PRODUCT DATA SHEET

Delta MS 20 Access Port



Description

Delta MS 20 Access Ports enables the 20mm cavity of the Delta MS 20 membrane to be inspected and flushed through should the need arise, making the whole cavity drained system maintainable and reducing long term risks. Ideal for inclusion with modular drainage.

Delta MS 20 Access Ports are supplied pre-fixed into a rectangular piece of Delta MS 20 Membrane which can be linked and sealed in the standard manner for Delta MS 20 Membrane. Delta Cornerstrip is recommended for a continuous waterproofing solution.

Where large floor areas are being covered or where modular sub floor drainage or perimeter channel and sub floor drainage are used then the inclusion of the MS 20 Access Ports ensures all aspects of the Type C System are maintainable.

Features

- · For ease of cleaning, inspection, and maintenance of Delta MS 20 membrane floor cavity
- · Compatible with Delta Basement Drainage Systems
- · Compatible with Delta Type C Cavity Drained Protection Systems

Fields of Application

- Where large floor areas are being covered with Delta MS 20 membrane
- · Modular sub-floor drainage
- · Where a mix of channel and sub-floor drainage are intended to
- Essential part of a Type C Cavity Drained Protection system
- · Essential part of a Basement Drainage System

Associated Products

- · Delta MS 20 Membrane
- · Delta Cornerstrip
- · Delta Basement Drainage


Product Details

DMS 124

Specification

- BS 8102:2022 Protection of below ground structures against water ingress. Code of practice
- · NBS Specification R18 (Clause 310) Pumping Stations and Pressure Pipelines

Technical Drawing - DW-253-1-(C)

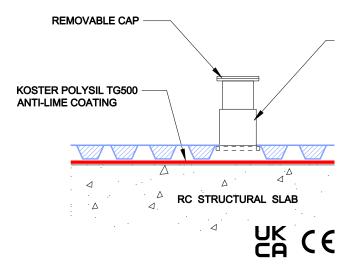

Other Information

All data and information contained in these Product/Technical Data Sheets is up-to-date and correct as at the date of issue. The information given is suggested as quidance and should only be used for evaluating your specific application. Delta Membrane Systems Limited cannot control or anticipate the conditions under which this product may be used, each user should review the information in specific context of the planned use. The information contained in these Product/Technical Data Sheets should not be considered a warranty, expressed, or implied, including but not limited to a warranty of merchantability or fitness for a particular purpose. In no event shall Delta Membrane Systems Limited be liable for any incidental or consequential damages resulting from the use, misuse, or inability to use the product. This exclusion applies regardless of whether such damages are sought based on breach of warranty, breach of contract, negligence, strict liability in tort, or any other legal theory. When in doubt, contact Delta's Technical Team on 01992 523 523

